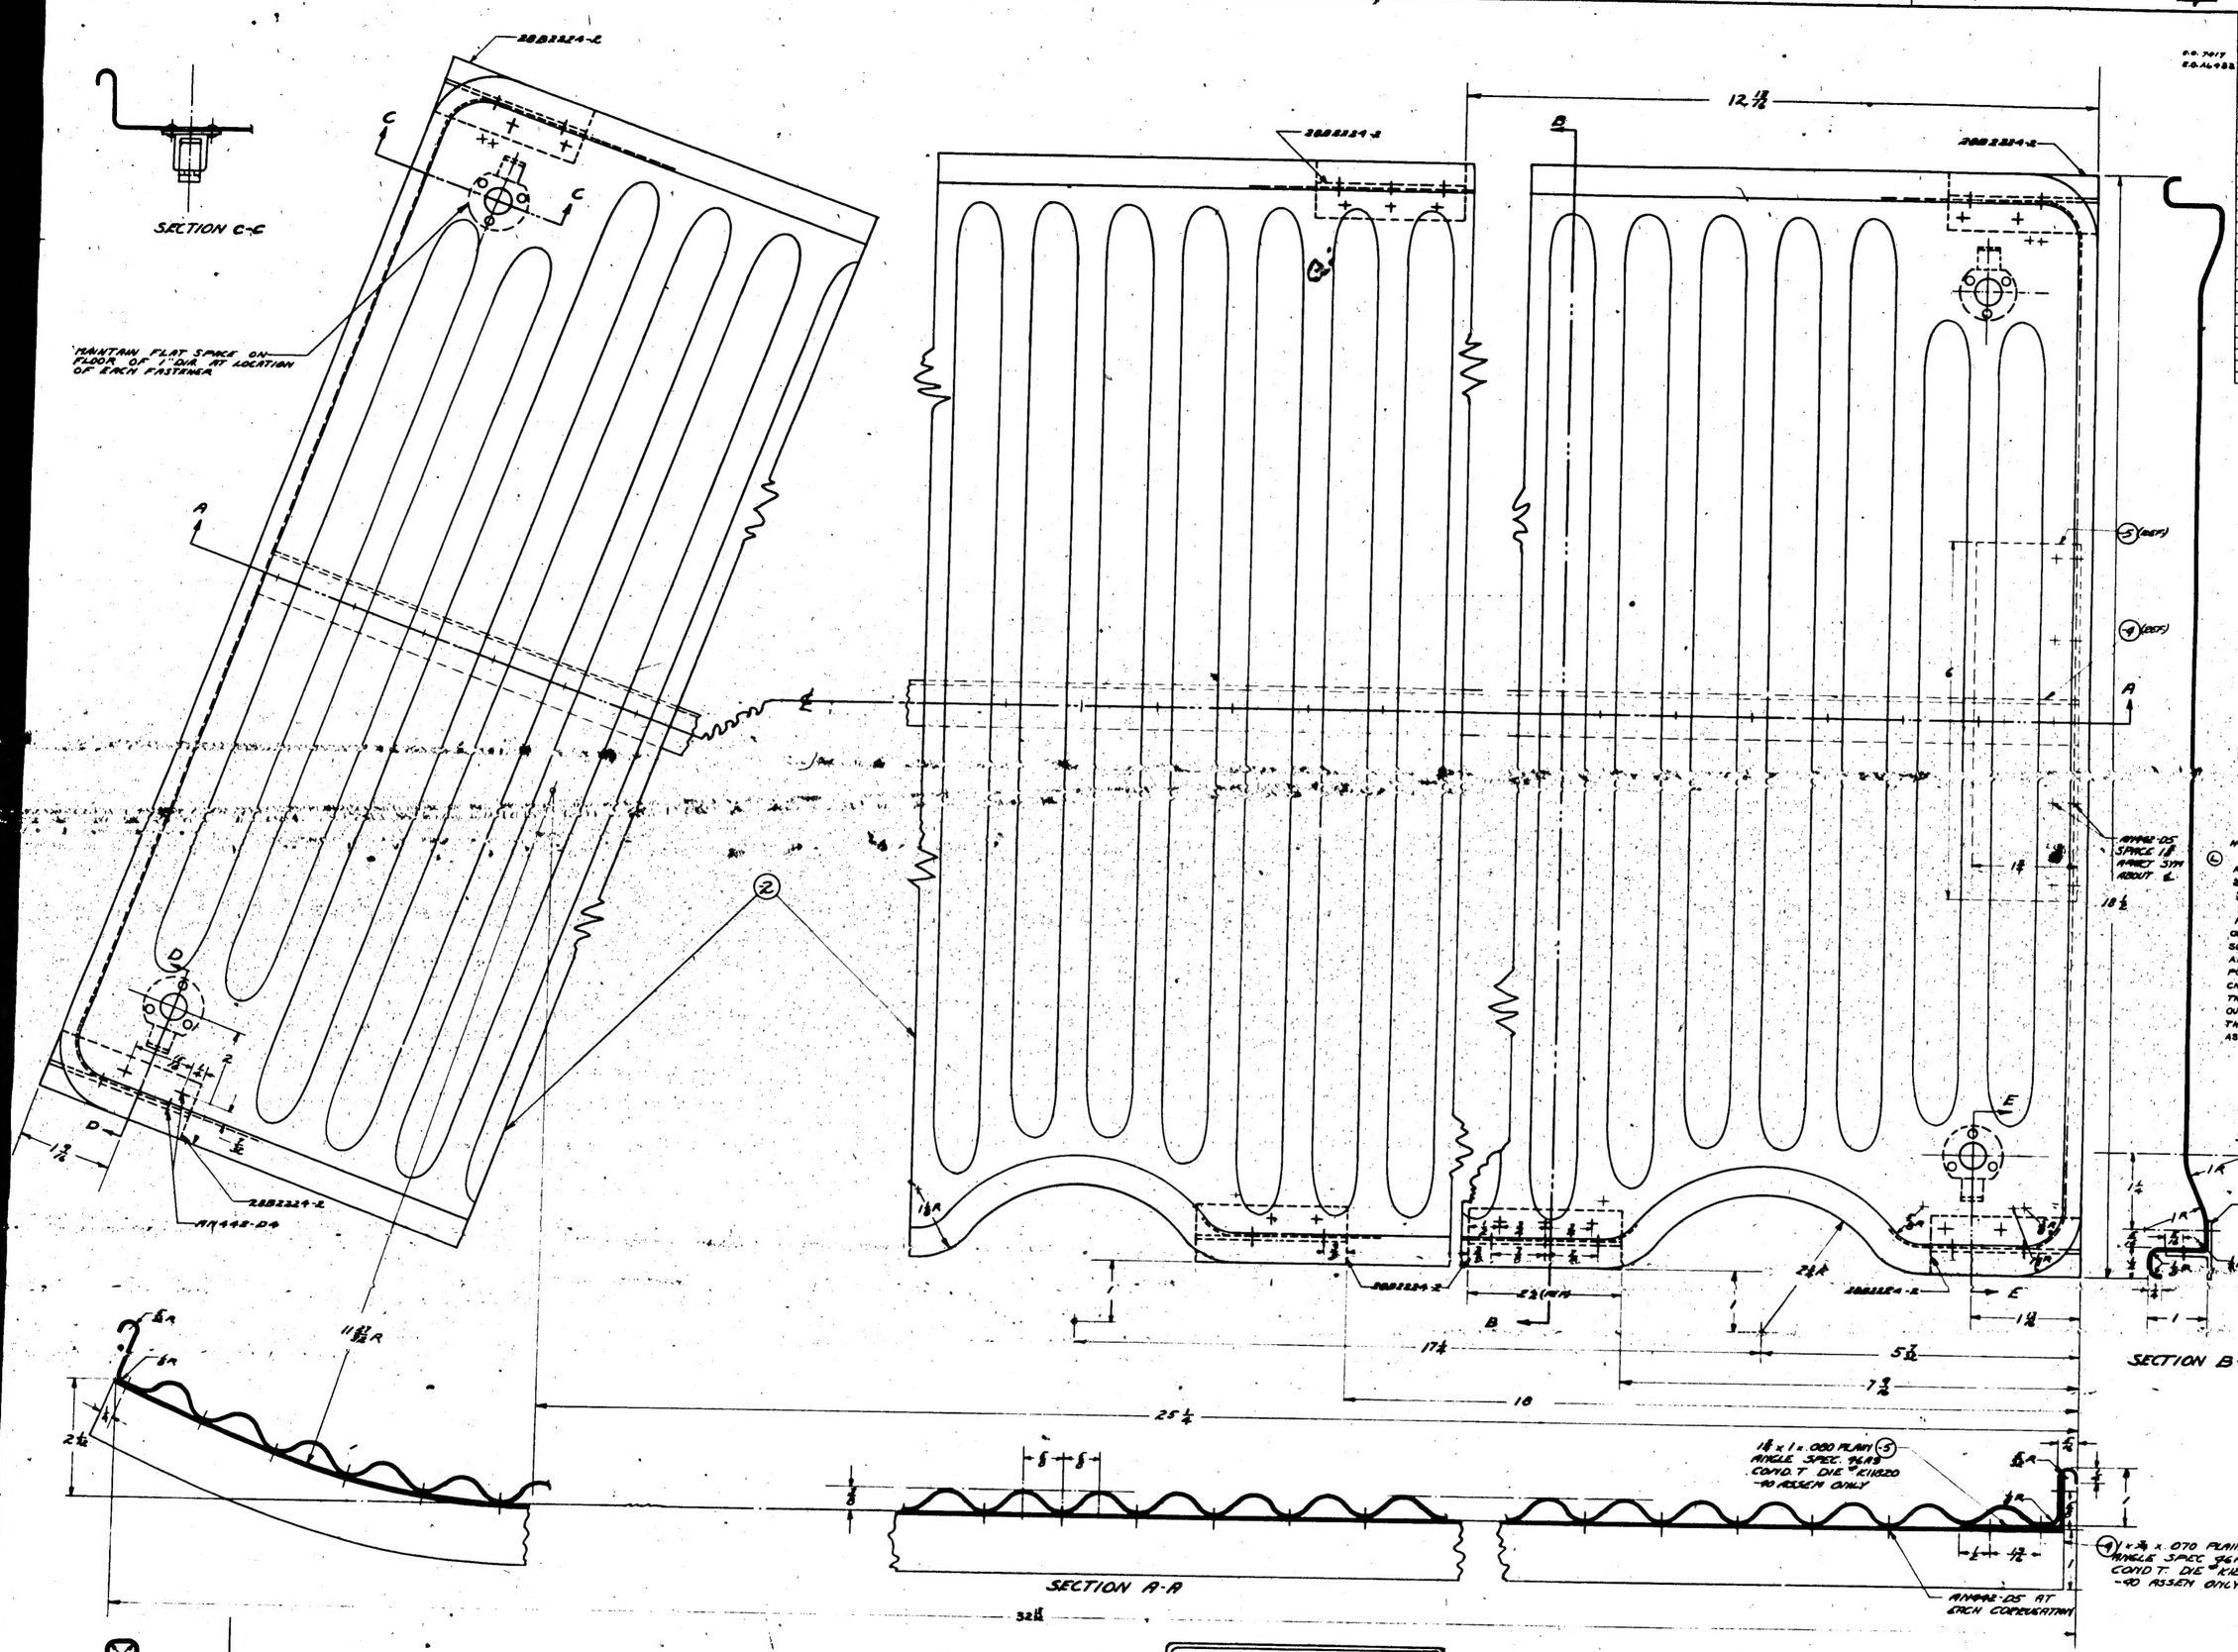

SUPPLIES & EQUIPMENT CLASSIFICATION			
LET	ALTERATION	DATE	BY
J	TRACED UP TO DATE		
K	ADDED -4, -5 & -6 PER ECN	8 FEB	
L	REMOVED 25B1967 FROM PART 7-91		
	& ADDED NOTE TO PAGE 5		
	DRAWING REQUIREMENT BLOCK		
	UP TO DATE		

E.O. 7017
E.O. 4488

NOTE:
ANCHOR NUTS & STANLEY FASTENERS ARE TO BE FINISHED AS PER SPEC. ZF-26-006 #102.26.
SPEC ZF-26-006 #102.26
ANCHOR NUTS (STEEL) & STANLEY FASTENERS: APPLY 1 BRUSH COAT OF ZINC CHROMATE PRIMER TO THE CONTACTING SURFACES OF THE NUT OR FASTENER. APPLY 2 COATS OF PRIMER TO THE SUPPORTING SURFACE. ASSEMBLE WITH ZINC CHROMATE PASTE IN THE JOINT SUCH THAT EXCESS MATERIAL IS SQUEEZED OUT AT ALL BOUNDARIES. REMOVE THE EXCESS MATERIAL IN SUCH A MANNER AS TO FORM A FILLET.

BAY PAINT - ASPHALT VARNISH
SPECIAL PAINT
FINISH CODE

MATERIAL:-
.040 AL. ALLOY SHT. SPEC. 47A10 COND. H (2430)
H.T. 5A53 (COND. T)
-2

FINISH:-
2-P BEFORE ATTACHING FASTENERS 22B035
2 BAY COMPLETE ASSEMBLY
2 BAY COMPLETE ASSEMBLY

| | | |